

QUICK  
REFERENCE

How to use the system - Panel

Diagram illustrating the system panel components and their functions:

- Status indicator
- Touch screen
- Keypad KP-102 (option)
- Power indicator
- Energy Save Mode on/off
- Reset the settings
- Stop a process
- Start a process
- Login/logout
- Voice guide
- Return to home screen
- Display help
- Switch to enlarge display mode
- Enter a value or a number
- Clear a value

Touch screen - Home

Diagram illustrating the touch screen home screen layout and functions:

- Display total number of printed pages
- Search for a function
- Display active or standby jobs
- Adjust the touch screen / configure touch screen operation
- Message display
- Shortcut key area\*
- Return to home screen
- Log in/log out
- Reset the settings
- Toner supply indicators
- Switch to enlarge display mode\*\*
- Display help\*\*
- Interrupt a process\*\*
- Scan a preview image\*\*
- Configure settings/display use status
- Start a process
- Stop a process

\*Up to 25 shortcut keys assigned to any function can be displayed in three screens. **Utility** is always displayed fixed on the lower right of the first page.

\*\*This is a **Register** key. In the Administrator Settings it can be assigned to any function.

Operating the touch screen\*

1. **Tap** to select or determine a menu.
2. **Double-tap** to retrieve detailed information or enlarge a thumbnail image.
3. **Drag** to move a display position on an application or preview screen.
4. **Click** to scroll an address or job list and feed thumbnail-view pages.
5. **Long-tap** to display the icon related to the document.
6. **Drag & Drop** to move a document to the intended place.
7. **Pan** to move a displayed image.
8. **Pinch-in/Pinch-out** to enlarge or reduce a preview image.
9. **Rotate** two fingers to rotate a preview image.

\*Available touch functions vary depending on displayed screen.



KONICA MINOLTA

# bizhub C751i/AccurioPrint C751i

## Operation of keypad\*

1. Tap the numerals or the input area on the screen to display the keypad.




2. If necessary, touch the upper side of the keypad and drag it to another display position.



\*If the system is equipped with the optional hardware keypad KP-102, it can be used instead.

## Basic copy functions - Make a copy


1. Position the original(s).

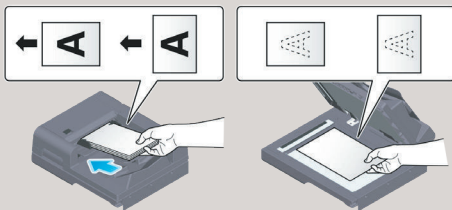

2. Tap **Copy** on the home screen.



3. Tap the input area to display the keypad.

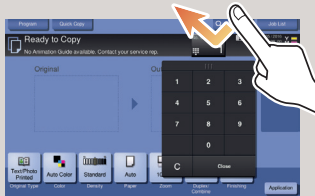

4. Type in the number of copies.

5. Tap **Start**.



## Copy operations - Basic copy screen



Register a copy program

Display Quick Copy screen

Number of copy sets


Input/output image  
(only visible when originals are placed on  
platen glass or document feeder)

Select the image quality level of the original

Select the copy color mode (e.g. Full Color,  
Black & White)

Adjust the brightness of the copy

Select paper size and type of the original/  
change size and type of the paper loaded in  
paper trays

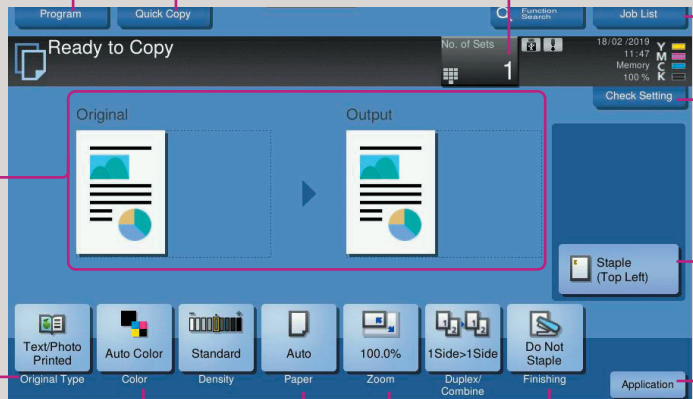

Display job list

Check copy settings

Check Finishing settings

Specify additional  
copy settings

Specify Finishing settings

Specify Duplex/  
Combine settings

Specify enlargement or  
reduction ratio

\*Available functions depend on system configuration.

## Zoom


1. Position the original(s).
2. Tap **Zoom** in the copy screen.
3. Make the desired settings.
4. Tap **OK**.
5. Tap **Start**.

Automatically reduce/enlarge  
original size to paper size

Change zoom  
manually

Different values for X and Y  
(distortion)

Copy the entire original  
including its edges by slightly  
reducing the original size

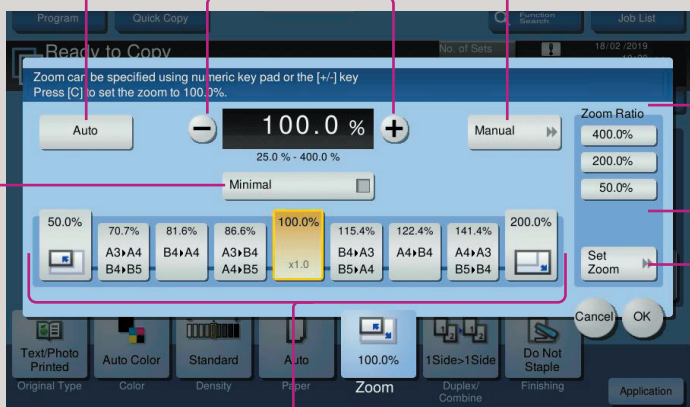

User defined zoom  
(values can be changed)

Change user defined  
zoom values


Preset zoom values

## Duplex/Combine

1. Position the original(s).
2. Tap **Duplex/Combine** in the copy screen.
3. Make the desired settings.
4. Tap **OK**.
5. Tap **Start**.

Copy 2 - 8 document pages  
onto one page

Select 1-sided or  
2-sided copying

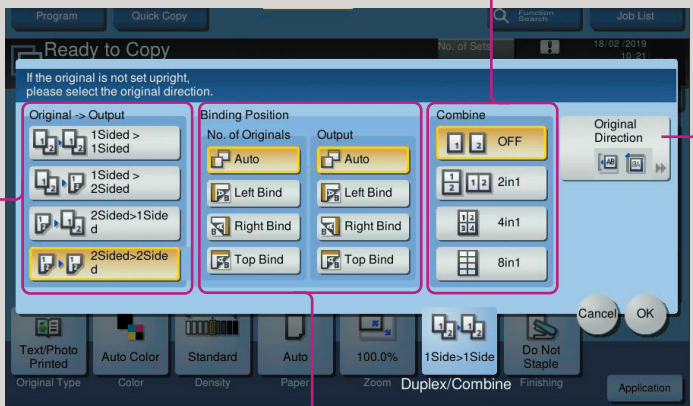

Select orientation of the origi-  
nal loaded into ADF or placed  
on the original glass

Specify binding positions for the  
original and the copies






KONICA MINOLTA

# bizhub C751i/AccurioPrint C751i

## Finishing

1. Position the original(s).
2. Tap **Finishing** in the copy screen.
3. Make the desired setting(s)\*.
4. Tap **OK**.
5. Tap **Start**.

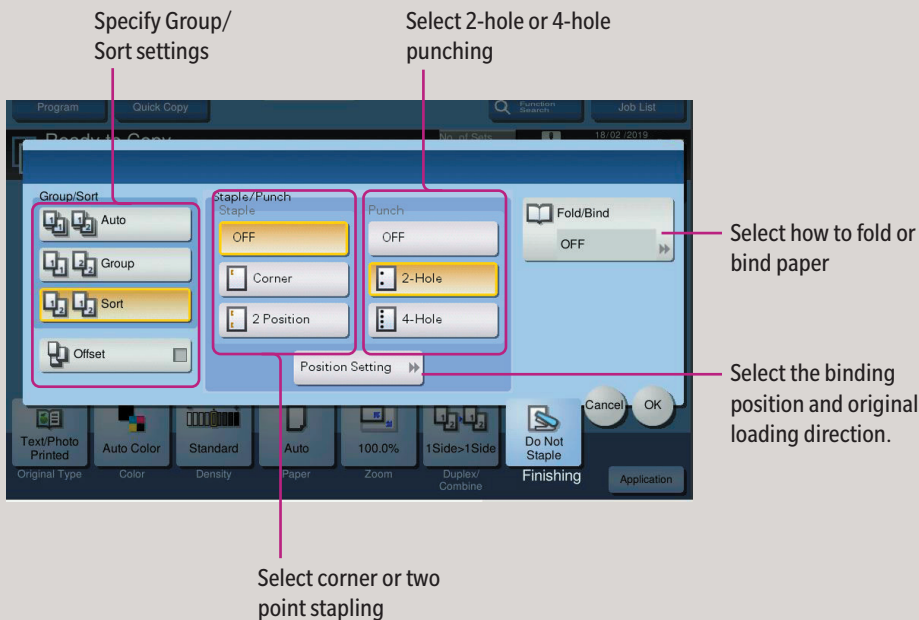


## Scan to USB memory - (Direct input)

1. Plug the USB memory device into the USB port.




2. Position the original(s).
3. Tap **Save a document to External Memory**.

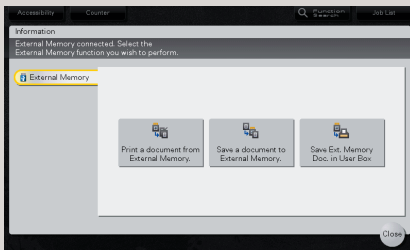


4. Make the desired setting(s).
  5. Tap **Start**.
- The file is saved.

## Scan to e-mail (Direct input)

1. Position the original(s).
2. Tap **Scan/Fax** in the main menu.
3. Tap **Direct Input**.

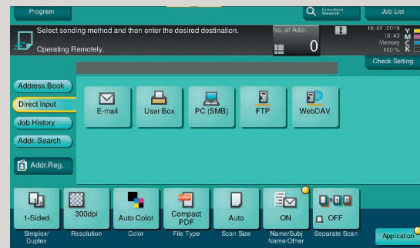


4. Tap **E-mail**.
5. Enter the destination address.

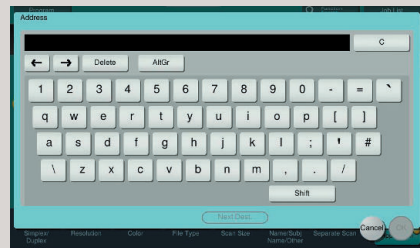

6. Tap **OK**.
  7. Tap **Start**.
- The file is sent.

## Scan operations - Scan/Fax screen\*

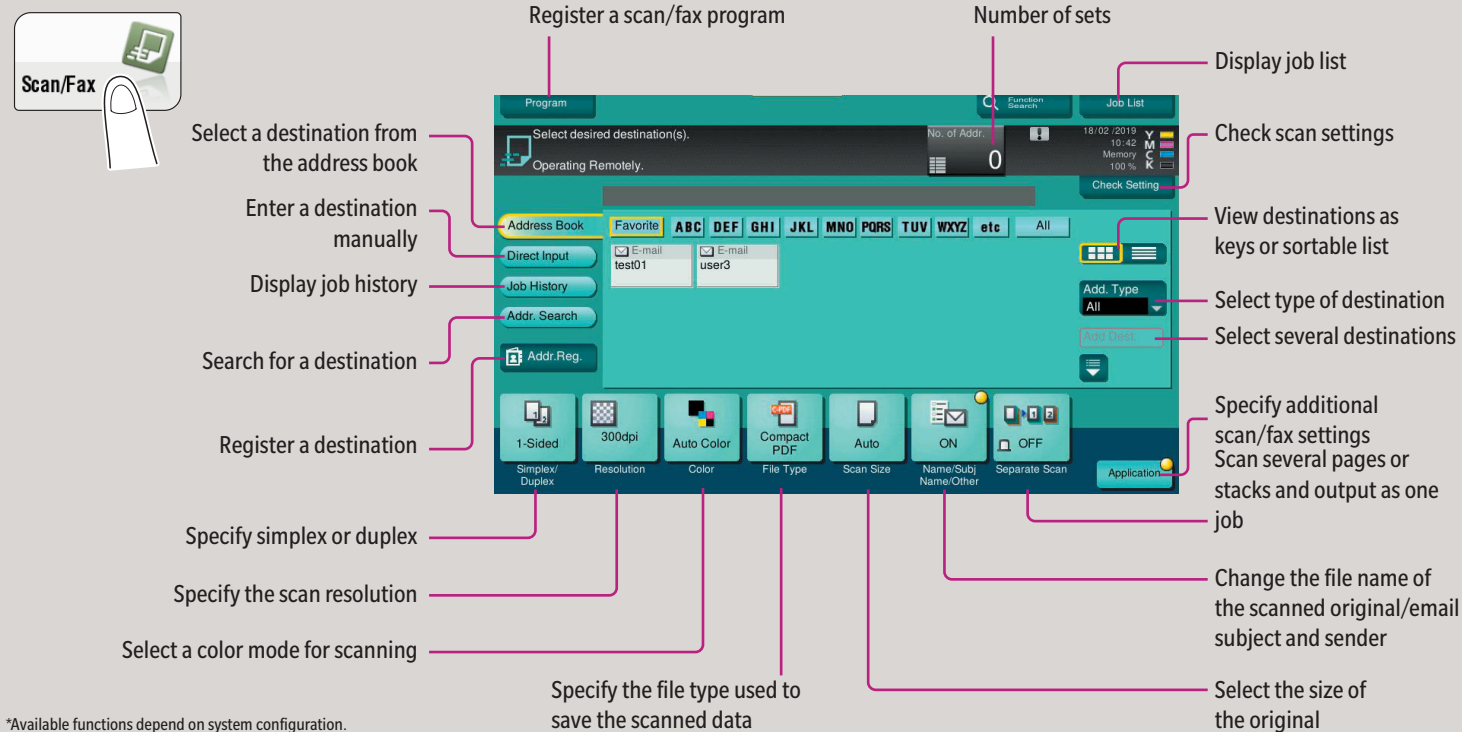

## Search for a destination

1. Tap **Scan/Fax** in the main menu.  
The destinations categorized into **Favorite** are displayed.
2. Tap **Addr. Search**.
3. Tap **Name Search**, **Character Search**, or **No. of Destination**.
4. Enter the search text and tap **Search**.
5. Select the destination from the search result.
6. Tap **Start**.  
The file is sent.



## Sending data to multiple destinations


1. Position the original(s).
2. Tap **Scan/Fax** in the main menu.  
The destinations categorized into **Favorite** are displayed.
3. Tap **Add. Type**.
4. Select the desired type of destination.
5. Specify a destination.
6. Tap **Add Dest**.
7. Specify the next destination and confirm with **Yes**.
8. Repeat Step 6 and 7 until all desired destinations are specified.
9. Tap **Start**.  
The file is sent.






Register a destination

- 1. Tap **Address Book** in the home screen.
- 2. Tap **New**.
- 3. Select the type of destination you want to register.
- 4. Enter the destination information and tap **Register**.

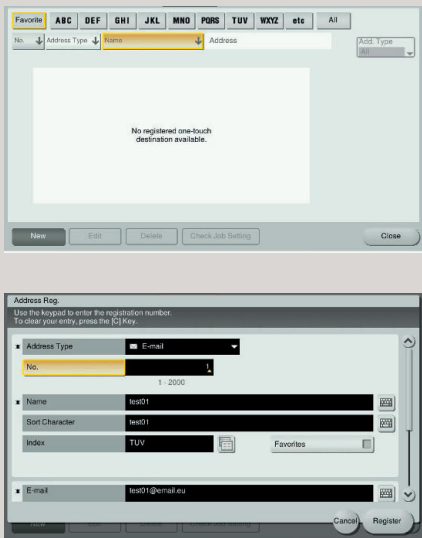

Box Operations - User Box screen

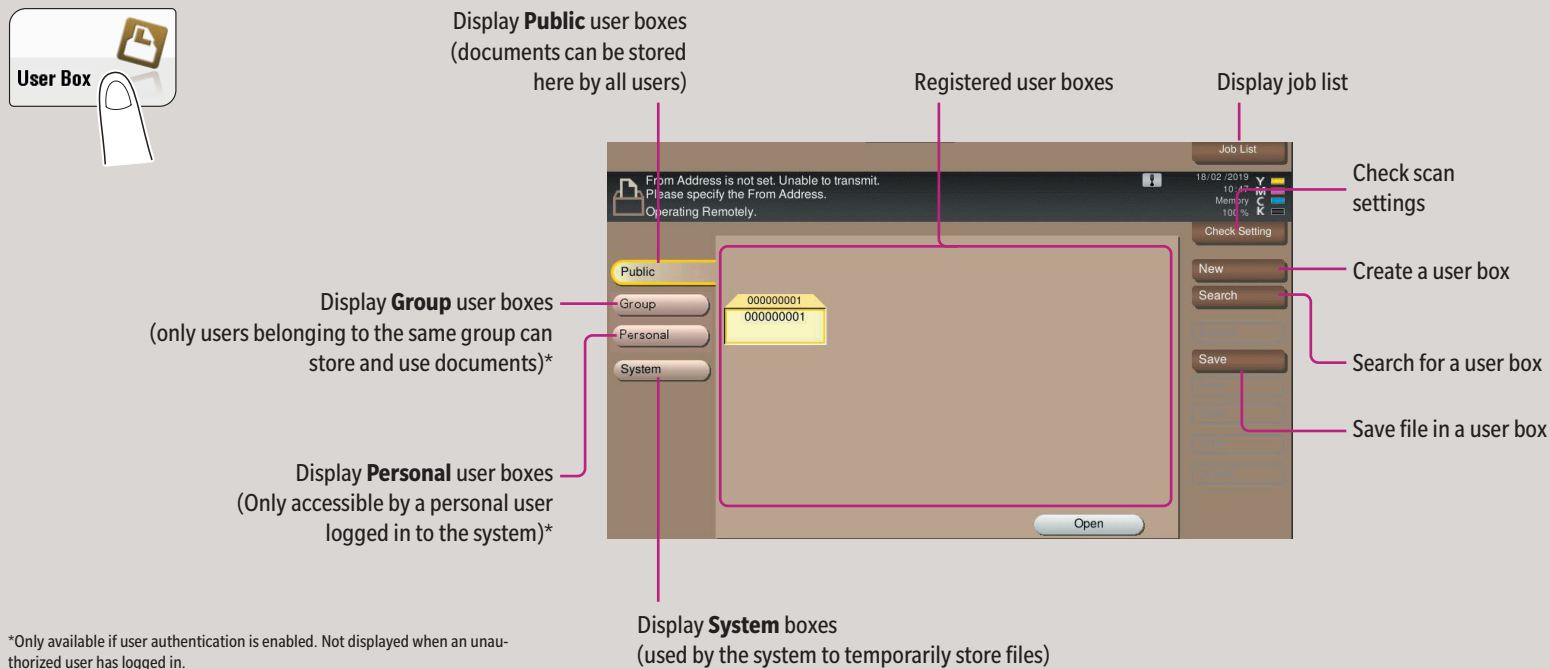


Save file in a public user box

- 1. Position the original(s).
- 2. Tap **User Box** in the main menu.
- 3. Tap **Public**.
- 4. Select the desired user box and tap **Save**.
- 5. Set the file save options and scan settings if necessary.
- 6. Tap **Start**. The file is saved.



Create a user box

- 1. Tap **Utility** on the Home screen.
- 2. Tap **Utility>Box>User Box List**.
- 3. Tap **New Registration**.
- 4. Enter the destination information and tap **OK**.

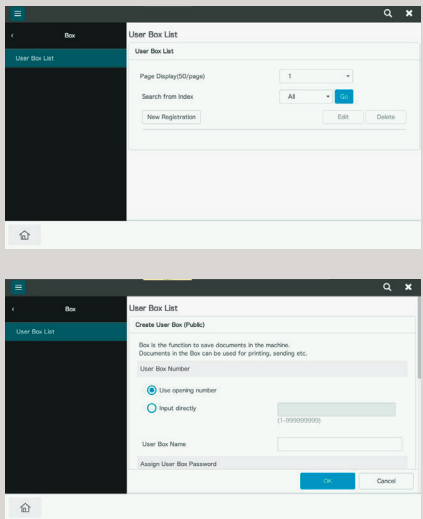

Fax operations (only with fax option) - Send a fax

- 1. Position the original(s).
- 2. Tap **Scan/Fax** in the main menu.
- 3. Specify the fax destination.
- 4. Tap **Start**. The file is sent.

